



GOULDS PUMPS



PUMP SELECTION GUIDE

Goulds Pumps



ITT Industries

Engineered for life

Pump Selection Guide

Goulds Pumps presents this Pump Selection Guide to assist users in making an easy initial selection of the best pump for a particular service. To do this, simply refer to the selection chart on page 3 where the full line of Goulds pumps are listed by pump type.

For more details about your selection, refer to the page indicated.

Contact your nearest Goulds, A-C sales office or representative for a complete data package on any pump(s) in which you are interested. They will also furnish you with any information you require to assure proper pump selection for optimum reliability and performance.

Goulds Pumps...Serving The World's Industries



Chemical

The family of chemical process pumps include both ANSI and ISO models. Goulds specializes in high alloys for our chemical pumps ranging from 316SS to Zirconium and even special alloys if needed. Unique non-metallic pumps offer distinct advantages when handling severe corrosives.

Magnetic drive pumps are designed for services where leakage cannot be tolerated. Our complete understanding of chemical processing and related industries gives us a clear advantage in finding solutions to these particular pumping problems.



Pulp And Paper

Goulds leadership in the pulp and paper industry has been largely due to the success of our comprehensive range of pumps that stand up to the harsh operating requirements of this industry. The Model 3175 has been prized for performance since its introduction in 1968. Goulds latest

3180/3185 paper stock/process pump line extends the offering farther for users with a preference for a metric pump. Other superior pumps include the 3500 medium consistency stock pump and a complete line of double suction and LoPulse fan pumps.



Mining And Minerals

Goulds and A-C Pump dominance in the mining industry dates back to the latter 1800s. Designed for the most severe applications, our pumps can be found in coal, aluminum, copper, iron, clay, phosphate, potash, soda ash, salt, gold and aggregate industry throughout the world.

Goulds & A-C offer the widest range of corrosion and abrasion resistant slurry pumps in the industry, including vertical, horizontal and submersible designs for cyclone feed, tailings disposal, minerals processing, mine dewatering, clarifier underflow, and sump services.



Power Generation

Goulds offers a wide variety of pumps designed specifically for uses within this industry. The Model 3600, the most modern axially split multi-stage pump in the world, is ideally suited for boiler feed service. The 3310H segmented multi-stage pump is proven in over 1200 installations worldwide.

Vertical turbine and double suction pumps can handle the most demanding condensate or circulating water needs. Sumps can be cleared with Goulds line of vertical or submersible sump pumps. Also available are pumps for slurry, ash handling and other tough applications.



Oil Refining And Gas Processing

The Model 3700 API process pump has set performance standards and contributed to Goulds leadership in this industry. For in-line services, Goulds offers the 3910 API pump.


Vertical turbine pumps are available in any configuration including can pumps for low NPSH, fire pumps and submersibles. Design and manufacturing capabilities include standard commercial grades, ASME Section VIII, and API-610 for total line capability.



Primary Metals

The wide range of products makes Goulds the ideal choice for the demanding services of this industry. Vertical and submersible abrasives handling, slurry pumps for scale pits, chemical pumps for pickle liquor and leaching solutions,

vertical turbines and double suction pumps for cooling tower and dewatering applications. Also, pumps for waste acid, scrubber service, and quench.



Water And Wastewater

Goulds and A-C Pump offer the most comprehensive line of double suction, end suction, multi-stage, non-clog and vertical turbine pumps for water supply, booster, low lift, and high lift.

For non-clog solids handling, a range of horizontal, vertical sump and submersible pumps have helped professional engineers solve pollution problems around the world.



Food And Beverage

Adhering to strict process requirements is only one of the reasons for Goulds entry into the forefront of these industries. Goulds pumps handle a wide variety of grain processing,


water, wastes, corrosives, and erosives. Breweries, bottling companies, canneries and a multitude of food and liquid industries rely on Goulds for successful operations.

Pump Selection Chart

Goulds makes the widest range of pumps in the industry — pumps to handle virtually any service. This selection chart is designed to help you find and specify the best pump for your service.

Pump Category	Goulds Model	Pump Type	Chemical	Pulp & Paper	Mining & Minerals	Power Generation	Oil Refining & Gas Processing	Primary Metals	Water & Wastewater	Food & Beverage	Nature of Pumpage				Refer to Page	
											Corrosive	High Temperature 500 F (260 C) and Greater	Solids			
													Abrasive	Non-Abrasive		Fibrous/Stringy
PumpSmart	Process Pumping System														4	
PRO Services	Repair & Service of all Rotating Equipment Types and Manufacture														4	
Paper Stock/ Process	3175	Paper Stock/Process													5	
	3180/3185	Paper Stock/Process													5	
	3181/3186	High Temperature													5	
Chemical Process	3500	Heavy Duty Paper Stock													5	
	3171	Vertical Sump & Process													5	
	CV 3171	Non-Clog Vertical Sump Process													5	
	NM 3171	FRP Vert. Sump/Process													5	
	3196	ANSI Chemical Process													6	
	LF 3196	Low Flow ANSI Process													6	
	HT 3196	ANSI High Temperature Process													6	
	CV 3196	Non-Clog Process													6	
	3796	Self-Priming Process													6	
	3996	ANSI In-Line Process													6	
	3296 EZMAG	ANSI Metallic Sealless Process													7	
	NM 3196	ANSI FRP Process													7	
	3298	ANSI Tefzel® Lined Sealless													7	
	SP 3298	ANSI Tefzel® Lined Sealless													7	
	3198	ANSI PFA Teflon® Lined Process													7	
	V 3298	Tefzel® Lined Sealless													7	
	3299	ANSI PFA Teflon® Lined Sealless													7	
	IC	ISO Chemical Process													8	
	ICB	Close-coupled ISO Process													8	
	ICP	High Temperature ISO Process													8	
ICM	ISO Metallic Magnetic Drive													8		
ICV	ISO Vertical Column, Wet Pit													8		
ICMP	High Temp. ISO Magnetic Drive													8		
API Process	3700/3710	API-610 Process													9	
	3910	API-610 In-Line													9	
	3620	High Temp. Double Suct.													9	
	3640	High Temp. Two-Stage													9	
Sump/ Abrasives/ Solids Handling	Whirl-Flo	Vortex													10	
	Prime Line	Industrial Self-Priming													10	
	Trash Hog	Solids Handling, Self Priming													10	
	VHS	Vertical Cantilever													10	
	VJC	Vertical Cantilever													10	
	HSU	Submersible													10	
Abrasive Slurry/Solids Handling	HSUL	Submersible													10	
	JCU	Submersible													10	
	AF	Axial Flow													11	
	JC	Medium Duty Abrasive Slurry													11	
	SRL	Rubber-Lined Abrasive Slurry													11	
	SRL-C	Rubber-Lined Abrasive Slurry													11	
	SRL-XT	Rubber-Lined Abrasive Slurry													11	
	RX	Side Suction Abrasive Slurry													11	
	5500	Severe Duty Abrasive Slurry													11	
	HS	Non-Clog Solids Handling													11	
Multi-Stage & Double Suction	CW	Abrasive Slurry													11	
	CWX	Abrasive Slurry													11	
	3310H	High Pressure Multi-Stage													12	
	3600	Heavy Duty Multi-Stage													12	
	3335	Diffuser Type Multi-Stage													12	
	3935	Diffuser Type Multi-Stage													12	
	3400 Series	Single-Stage, Double Suction													13	
	3355	Multi-Stage													13	
Wastewater	3316	Two-Stage													13	
	NSW	Non-Clog, Soft Solids-handling													14	
	NSX													14		
	NSY														14	
	WSY/SSE/SSF														14	
Vertical Turbine	WCAX	Wet Pit Pumps													14	
	YDD														14	
	WCA														14	
	WCB														14	
	WMCC														14	
	WMCE														14	
	VIC	Vertical Turbine/Can Type													15	
	VIT	Vertical Industrial Turbine													15	
VIS	Vertical Submersible													15		
VMP	Vertical Marine													15		

*®TEFZEL and TEFLON are registered trademarks for fluoropolymer resins, films and fibers made by DuPont.

 Ideally Suited for Service Indicated



PRO Services™ Extending Equipment Life...

Product Repair (all types and brands of rotating equipment)

- Service Center Repair
- Field Service
- Parts Supply

Reliability Improvement

- Inventory Management
- Replacement/Exchange
- Turnkey Repair/Installation
- Training

Optimization of Assets

- Predictive Analysis/Condition Monitoring
- Root Cause Failure Analysis
- Pump & System Assessments
- Upgrades – Mechanical & Hydraulic
- Maintenance Management/Contract Maintenance

- Technical Expertise
- Factory Trained Service Personnel
- Quality
- Fast Turnaround
- Emergency Service – 24 hours/day, 7 days/week
- ISO and Safety Certified



PROsmart™ encompasses the latest technology* in condition monitoring to assure that your plant continuously runs at peak efficiency. It provides a cost-effective solution to maintaining uptime on all of your rotating equipment. PROsmart continuously monitors, analyzes (to pre-stated parameters) and annunciates an alarm when critical criteria is not met. By identifying, diagnosing, and sounding an alert to potential equipment problems before they have a chance to manifest into unexpected downtime or catastrophic failure, PROsmart helps to assure plant profitability.

PROsmart delivers benefits that go right to the bottom line.

- Extends equipment life
- Optimizes costly “walk arounds” by skilled personnel
- Can help reduce overall equipment failures and the cost of downtime
- Sends alerts prior to potential catastrophic process failures
- Provides “state-of-the-art” predictive analysis
- Consolidates data for equipment optimization (*Patent pending)

PROsmart™ is a self-powered device, or can be set up to use local power if it is available, that works 24/7 with alarm and alert capabilities. Individual computer formulas (algorithms) are created based on testing of the rotating equipment. These are used as the basis for evaluation and are stored on the PROsmart central computer.

PUMPSMART®

CONTROL SOLUTIONS

Simplicity
Dedicated pump control and protection logic in an easy to use package

Reliability & Safety
Longer pump and seal life means reduced maintenance and downtime

Control
Improved pumping accuracy and repeatability means better process control

Operating Cost
Variable speed cuts energy cost up to 70%
Reduced maintenance & downtime cuts cost

Flexibility
Control any centrifugal pump up to 700 HP

PROCESS PUMPS

Model 3171

Vertical Sump and Process



The "Veteran" vertical sump and process pump. Thousands of installations — industrial process, sump drainage, corrosive liquids, pollution control, molten salts. Rugged, heavy construction. Simple mounting. Also available as fully-compliant API-610 VS4 model.

- Capacities to 3,180 GPM (722 m³/h)
- Heads to 344 feet (95 m)
- Temperatures to 450° F (232° C)
- Pit Depths to 20 feet (6 m)

Materials: Cast Iron, Bronze-fitted, CD4MCu, 316SS, Alloy 20, Hastelloy B and C
21 Sizes



Model 3175

Paper Stock/Process



For the toughest services. Thousands of installations handle stock, solids, fibrous/stringy materials, abrasive slurries, and corrosives. Patented dynamic seal option eliminates mechanical seal problems.

- Capacities to 28,000 GPM (6360 m³/h)
- Heads to 350 feet (107 m)
- Temperatures to 450° F (232° C)
- Pressures to 285 PSIG (1,965 kPa)

Materials: All Iron/316SS Trim, 316SS, 317SS, CD4MCu
27 Sizes



Model NM 3171

FRP Vertical Sump/Process



For severe corrosive applications. Casing and impeller interchangeable with Model NM 3196. Cost-effective alternative to high alloys.

- Capacities to 1,250 GPM (284 m³/h)
- Heads to 300 feet (92 m)
- Temperatures to 200° F (79° C)
- Pit Depths to 16 feet (5 m)

Material: High-strength, Corrosion-resistant GMP-2000*

13 Sizes

*Proprietary molding process/
material GMP-2000



Model 3500


Medium Consistency Systems



Thick stock pulp is pumped with the model 3500 medium consistency pumping system. System includes engineered standpipe, control valve, dilution system and level transmitter. A patented air separation device removes air from the pulp to improve mixing effectiveness.

Bleaching chemicals and oxygen are mixed in-line with the model 3501 mixer with double shear rotor, optimized injection port, and unique low pressure drop casing design.

- Consistencies from 8% to 16%
- Capacities to 1,500 (pump) and 2,000 adstpd (mixer)
- Pressures to 325 PSIG (2240 kPa)
- Materials from 316SS to Titanium

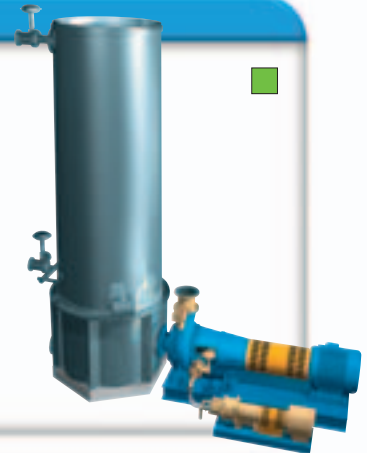

Model 3180/3185

Paper Stock/Process



All customer requirements were considered in this line of paper stock/process pumps. . . excellent hydraulic coverage, high efficiency, extreme ease of maintenance, and mechanical reliability.


The Model 3185 pump furnished with ISO or JIS flange drilling, metric fasteners, dimensions. Open, enclosed or Shearpeller™ impellers available. Labyrinth seals standard.

Model 3180 standard with ANSI flanges.

- Capacities to 26,000 GPM (6000 m³/h)
- Heads to 410 feet (125 m)
- Temperatures to 446° F (230° C)
- Pressures to 232 PSIG (1,600 kPa)

Materials:
All Iron/316SS Trim,
316SS, 317SS,
CD4MCu

33 Sizes

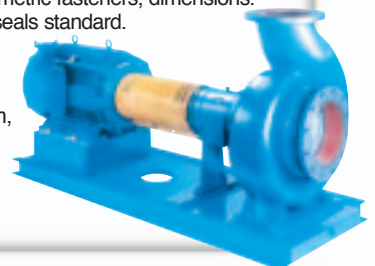

Model CV 3171

Vertical Sump and Process



The CV 3171 is a recessed impeller, circular volute type sump pump. Ideal for large solids and shear sensitive fluids. Circular volute minimizes radial loads making this the ideal pump for low flow process applications.

- Capacities to 1,300 GPM (295 m³/h)
- Heads to 320 feet (126 m)
- Temperatures to 450° F (232° C)
- Pit Depths to 20 feet (6 m)

Materials: Cast Iron, CD4MCu, 316SS, Alloy 20, Hastelloy B and C

6 Sizes



Model 3181/3186

High Temperature Paper Stock/Process



End suction, top centerline discharge, self-venting. Centerline mounted for high temperature services. High efficiency enclosed impeller. TaperBore™ seal chamber standard with mechanical seal arrangement.

- Capacities to 20,000 GPM (4,600 m³/h)
- Heads to 410 feet (125 m)
- Temperatures to 572° F (300° C)
- Pressures to 360 PSIG (25 bar)

Materials: CD4MCu, 316SS, 317SS

23 Sizes



ANSI PROCESS PUMPS

Model 3196

ANSI Process


This is the original ANSI pump that has become the standard of the industry. Over 600,000 installations attest to the remarkable performance of the 3196.

Available with a wide range of ANSI PLUS™ features for handling difficult applications. X-Series power ends provide standard features for improved bearing and mechanical seal life.

- Capacities to 6,000 GPM (1364 m³/h)
- Heads to 730 feet (222 m)
- Temperatures to 500° F (260° C)
- Pressures to 375 PSIG (2586 kPa)

Materials: Ductile Iron, 316SS, CD4MCu, Alloy 20, Monel, Nickel, Hastelloy B and C, Titanium

29 Sizes

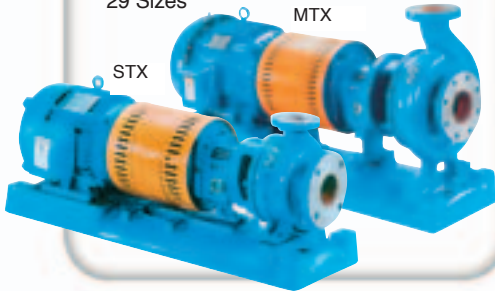

Model HT 3196


ANSI High Temperature Process Pump

Centerline mounted in a heavy duty fabricated steel casing support, the Model HT 3196 minimizes shaft misalignment and piping strain associated with elevated temperatures up to 700° F. This eighth member of the ANSI pump family features Goulds' premier X-Series power end, multiple seal chamber options including the Taper Bore™ Plus, and a wide variety of rigid and rugged mounting systems.

- Capacities to 4,500 GPM (1,023 m³/h)
- Heads to 925 feet (282 m)
- Temperature to 700° F (372° C)
- Pressures to 450 PSIG (3,102 kPa)

Materials: Carbon Steel, 316SS, CD4MCu, Alloy 20, Hastelloy C

28 Sizes

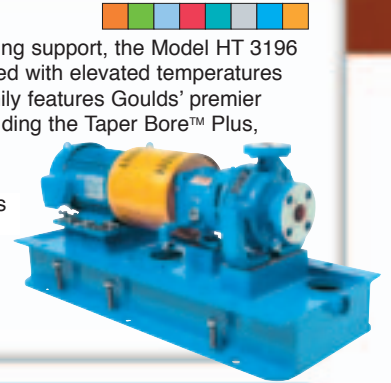

Model LF 3196

Low Flow ANSI Process

Designed specifically to provide superior performance for low flow services. Features a concentric (circular volute) casing and open radial vane impeller to eliminate hydraulic and mechanical problems at low flows. X-Series power ends.

- Capacities to 220 GPM (50 m³/h)
- Heads to 925 feet (282 m)
- Temperatures to 700° F (372° C)
- Pressures to 450 PSIG (3102 kPa)

Materials: Ductile Iron, 316SS, CD4MCu, Alloy 20, Hastelloy B and C

4 Sizes



Model CV 3196

Non-Clog ANSI Process

Perfect solution for handling bulky, fibrous, or shear-sensitive liquids. Recessed impeller design provides non-clog pumping with minimum solids degradation. Capability to handle liquids containing 10 to 20 percent air/gas. X-Series power ends.

- Capacities to 2,700 GPM (610 m³/h)
- Heads to 440 feet (134 m)
- Temperatures to 500° F (260° C)
- Pressures to 285 PSIG (1965 kPa)

Materials: Ductile Iron, CD4MCu, Alloy 20, Hastelloy B and C

7 Sizes



Model 3996

In-Line ANSI Process

For corrosives, abrasives, and high temperature. Fully open impeller, back pull-out design, heavy duty construction. Field alignment not required.

- Capacities to 1,500 GPM (340 m³/h)
- Heads to 700 feet (213 m)
- Temperatures to 500° F (260° C)
- Pressures to 375 PSIG (2585 kPa)

Materials: Ductile Iron, 316SS, Alloy 20, Monel, Nickel, Hastelloy B and C, CD4MCu, Titanium

13 Sizes



Model 3796

Self-Priming ANSI Process

One-piece casing eliminates need for separate priming chamber, air separator, valves, or by-pass line. Fully open impeller can be trimmed to meet specific hydraulic requirements. X-Series power ends.

- Capacities to 1,250 GPM (284 m³/h)
- Heads to 430 feet (131 m)
- Temperatures to 500° F (260° C)
- Suction Lifts to 25 feet (7.6 m)

Materials: Ductile Iron, 316SS, CD4MCu, Alloy 20, Hastelloy B and C, Titanium

8 Sizes



SEALLESS PROCESS PUMPS

Model SP 3298

Self-Priming Lined



When suction pressure is negative and air or gases must be evacuated to accomplish pump priming, the SP 3298 has a self-priming dual volute that primes on demand with only an initial charge of liquid in the casing. Priming is accomplished within the casing, eliminating the need for auxiliary priming systems.

- Capacities to 275 GPM (63 m³/h)
- Heads to 150 feet (46 m)
- Temperatures to 250° F (121° C)
- Pressures to 175 PSIG (1207 kPa)
- Effective Static Lift to 20 feet (6m)

Lining Material: Tefzel® (ETFE)



Model 3298

Magnetic Drive ANSI Lined



Designed to handle moderate to severe corrosives with or without solids. Sealless design provides effective alternative to pumps with mechanical seal problems. Thick linings for extended pump life.

- Capacities to 320 GPM (000 m³/h)
- Heads to 460 feet (161 m)
- Temperatures to 250° F (00° C)
- Pressures to 225 PSIG (0000 kPa)

Lining Material: Tefzel® (ETFE)
15 Sizes



Model 3296 EZMAG

Magnetic Drive ANSI Process



Robust, simple sealless design ideal for difficult liquids, such as corrosives, pollutants, ultra-pure liquids and toxics. Meets ANSI dimensional specifications. Features a bearing cartridge for ease of maintenance and improved reliability.

- Capacities up to 700 GPM (159 m³/h)
- Heads to 550 feet (168 m)
- Temperatures to 536° F (280° C)
- Pressures to 275 PSIG (1896 kPa)

Materials: 316SS
Others upon request

11 Sizes



Model V 3298

Vertical ANSI Lined Process



Ideal for moderate to severe corrosives. With or without solids, the 3298 can handle the tough chemical services. As a sealless design, it's an effective alternative to pumps with mechanical seal problems. Meets strictest EPA regulations.

- Capacities to 320 GPM (270 m³/h)
- Heads to 460 feet (129 m)
- Temperatures to 250°F (121°C)
- Pressures to 225 PSIG (1551 kPa)


Materials: Tefzel® (ETFE) Construction

4 Sizes



Model 3299

Magnetic Drive ANSI Lined



Designed to handle moderate to severe corrosives with or without solids. Sealless design provides effective alternative to pumps with mechanical seal problems. Thick linings for extended pump life.

- Capacities to 425 GPM (000 m³/h)
- Heads to 490 feet (000 m)
- Temperatures to 350° F (000° C)
- Pressures to 275 PSIG (1896 kPa)

Lining Material: PFA
5 Sizes



SEALED LINED & NON-METALLIC PUMPS

Model 3198

PFA Process ANSI Lined



Virgin PFA TEFLON® for handling a wide range of severe corrosive liquids, trace contaminants, and mixtures. The 3198 features ANSI B73.1 design, X-Series power ends. TEFLON® molded in place by high pressure technique and mechanically locked.

- Capacities to 800 GPM (182 m³/h)
- Heads to 450 feet (137 m)
- Temperatures to 300° F (150° C)
- Pressures to 225 PSIG (1550 kPa)

Material: PFA Teflon®

5 Sizes



Model NM 3196

FRP ANSI Process



All liquid end parts constructed of vinylester thermoset resin – the industry's choice for moderate corrosives. True volute design, one-piece casing with fully open impeller. Utilizes X-Series power ends for maximum interchangeability, conformity to ANSI dimensional standards. Corrosion resistant FRP baseplate standard.

- Capacities to 800 GPM (182 m³/h)
- Heads to 500 feet (152 m)
- Temperatures to 200° F (93° C)
- Pressures to 220 PSIG (1517 kPa)

Material: High Strength, Corrosion Resistant GMP-2000*

*Proprietary molding process/material GMP-2000



ISO PROCESS PUMPS

Model IC

ISO Process



This series is designed in accordance with ISO 5199 and ISO 2858, making it ideal for worldwide chemical or industrial process applications. IC pumps are fitted with a patented seal chamber design called the Cyclone seal chamber, which has been proven to provide the optimum sealing environment for extended mechanical seal life.

- Capacities to 1,980 GPM (450 m³/h)
- Heads to 482 feet (150 m)
- Temperature ranges from -40° F to 350° F (-40° C to 177° C)
- Pressures to 235 PSIG (16 bar)

Materials: Ductile Iron, 316SS, Duplex Stainless, Alloy 20, Hastelloy C and Titanium.



34 Sizes

Model ICB

Close-coupled ISO Process Pump



The ICB Series is an extension to the IC series ISO 5199 frame mounted chemical pump series. These new pumps provide a compact and economical pumping solution ideal for OEM applications and confined spaces in industrial processes. No spacer coupling or alignment is required, reducing capital equipment costs and simplifying installation and maintenance. ICB pumps are fitted with our patented Cyclone Seal Chamber, proven to provide the optimum sealing environment for extended mechanical seal life.

- Capacities to 1,980 GPM (450 m³/h)
- Heads to 492 feet (150 m)
- Temperature ranges from -40° F to 284° F (-40° C to 140° C)
- Pressures to 230 PSIG (16 bar)

Materials: Ductile Iron, Stainless Steel

29 Sizes



Model ICM

ISO Metallic Magnetic Drive Process



The ICM pump is the optimum metallic sealless pump for process fluid services in the chemical, paper, and general industries where ISO dimensions are preferred. The ICM is specifically designed to pump difficult fluids such as corrosives, pure, and toxic liquids. Its sealless, sturdy design combines with a wide variety of wet end materials. The bearings are chemical and abrasion resistant Silicon Carbide (SSiC). Optional SAFEGLIDE® PLUS dry-run protection can be provided.

- Capacities to 1,760 GPM (400 m³/h)
- Heads to 685 feet (210 m) at 3,500 rpm
- Temperature ranges from -40° F to 360° F (-40° C to 180° C)
- Pressures to 232 PSIG (16 bar)

Materials: Stainless Steel, Hastelloy, Ductile Iron, Alloy 20 and Titanium

22 Sizes



Model ICP

High Temperature ISO Process Pump



The ICP is a heavy duty chemical process pump designed for extreme temperatures and pressures. The ICP complies with ISO standards and features the patented Cyclone Seal Chamber for extended seal service life. Centerline casing design is self venting. Large capacity oil sump provides maximum bearing cooling. Optional inducer reduces NPSHr.

- Capacities to 1,980 GPM (450 m³/h)
- Heads to 492 feet (150 m)
- Temperature ranges from -40° F to 535° F (-40° C to 280° C)
- Pressures to 363 PSIG (25 bar)

Materials: Carbon Steel, Stainless Steel, Duplex Stainless Steel and Hastelloy C



34 Sizes

Model ICMP

High Temperature ISO Metallic Magnetic Drive Process




The ICMP is a heavy-duty metallic sealless pump for applications with high temperature and pressure conditions. It is designed for aggressive, toxic and pure media. The centerline casing is optimal for the compensation of dimensional changes due to temperature fluctuations. SSiC silicon carbide plain bearings, optionally with SAFEGLIDE® PLUS dry run protection. Unique cartridge plain bearing design. Inducer option.

- Capacities to 1,760 gpm (400 m³/h)
- Heads to 685 ft (210 m) at 3500 rpm
- Temperature ranges from - 40° F to 535° F (- 40° C to 280° C)
- Pressures to 365 PSIG (25 bar)

Materials: Stainless Steel, Hastelloy, Cast Iron, Alloy 20, Titanium

22 Sizes

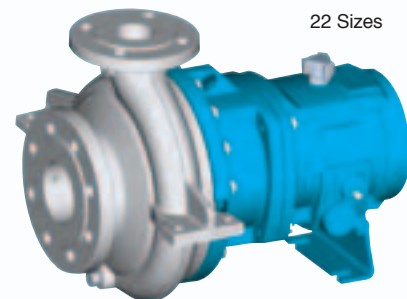

API PROCESS PUMPS

Models 3700 & 3710

API-610 Process



High temperature and high pressure process pumps designed to fully meet the requirements of API-610. Centerline support for high temperature stability, maximum rigidity. Tangential discharge for maximum hydraulic efficiency.

Available in top suction design (Model 3710).

- Capacities to 6,500 GPM (1,475 m³/h)
- Heads to 1,150 feet (350 m)
- Temperatures to 800° F (427° C)
- Pressures from full vacuum to 870 PSIG (6,000 kPa)

Materials: Carbon Steel, 12% Chrome, 316SS, Duplex SS, other high alloys

35 Sizes



Model 3600 & 3620

High Temperature Double Suction




Between bearings, radially split process pumps designed for smooth, reliable operation. Fully meets requirements of API-610.

- Capacities to 20,000 GPM (4,540 m³/h)
- Heads to 1,500 feet (455 m)
- Temperatures to 850° F (455° C)
- Pressures to 1,000 PSIG (6,895 kPa)

Materials: Carbon Steel, 12% Chrome, 316LSS, Duplex SS, other higher alloys

24 Sizes

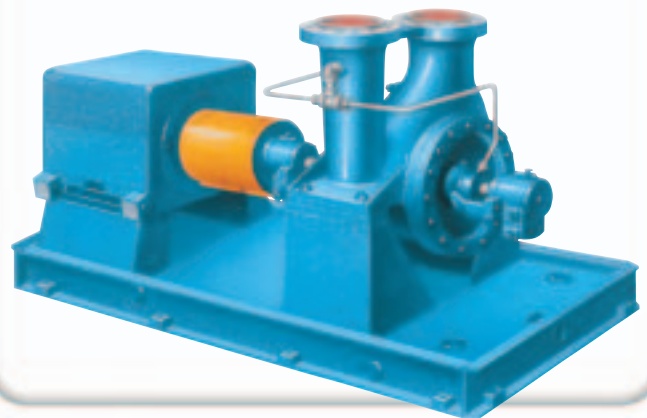

Model 3640

High Temperature Two-Stage



Between bearings, radially split process pumps designed for smooth, reliable operation. Meets toughest specification requirements of API-610.

- Capacities to 1,500 GPM (340 m³/h)
- Heads to 1,400 feet (425 m)
- Temperatures to 850° F (455° C)
- Pressures to 750 PSIG (5,170 kPa)

Materials: Carbon Steel, 12% Chrome, 316LSS, Duplex SS, other higher alloys

6 Sizes



Model 3910

Bearing Frame In-Line




High pressure, high temperature services meets API-610 requirements. Back pull-out for ease of maintenance. Bearing frame carries pump loads.

- Capacities to 7,500 GPM (1,700 m³/h)
- Heads to 750 feet (229 m)
- Temperatures to 650° F (343° C)
- Pressures to 595 PSIG (4,100 kPa)

Materials: Carbon Steel, 12% Chrome, 316LSS, Duplex SS, other higher alloys

28 Sizes

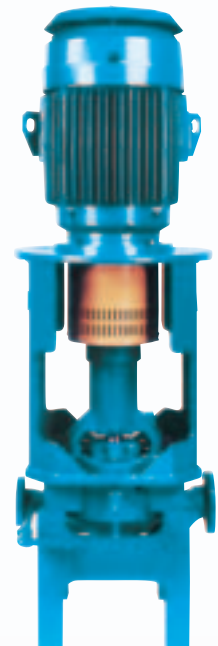

SUMP / ABRASIVES / SOLIDS HANDLING


Whirl-Flo®

End Suction Recessed Impeller

These rugged pumps are capable of passing port-sized spherical solids, slurries, stringy matters, and soft solids with clog-free dependability. Fully recessed impellers provide a straight flow path through the Whirl-Flo for unsurpassed solids handling and no casing wear. Whirl-Flo is available in a variety of metallurgies to handle a range of abrasive and corrosive liquids.

- Capacities to 2,400 GPM (550 m³/h)
- Heads to 340 feet (102 m)
- Temperatures to 250° F (120° C)

Materials: Cast Iron, HC600, 316 Stainless Steel

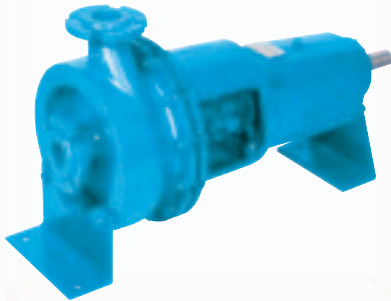


Prime Line

Industrial Duty Self-Priming

For tank unloading, sump and other suction lift applications, Goulds offers a complete line of heavy duty self-priming pumps which provide dependable, trouble-free operation. The Prime Line pumps offer high capacity, versatile options for handling chemicals, oils, and wastewater.

- Capacities to 7,000 GPM (1,600 m³/h)
- Heads to 280 feet (85 m)
- Temperatures to 250° F (120° C)
- Suction Lifts to 25 feet (7.6 m)

Materials: Cast Iron, Bronze Fitted, 316SS Fitted

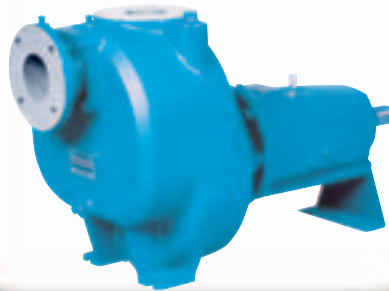


Trash Hog®

Solids Handling Self-Priming

Goulds Trash Hog is designed for superior solids handling capability, optimum pump performance, and extreme ease of maintenance for a wide range of industrial, pulp and paper, mining, and wastewater services. Whether handling sludge, debris or plant wastes, there's no other pump that compares to the Trash Hog.

- Capacities to 6,000 GPM (1,363 m³/h)
- Heads to 140 feet (43 m)
- Temperatures to 225° F (107° C)
- Pressures to 85 PSIG (586 kPa)
- Suction Lifts to 25 feet (7.6 m)
- Spherical solids to 3 inches (76 mm)

Materials: Cast Iron, Stainless Steel, CD4MCu, HC600 Fitted

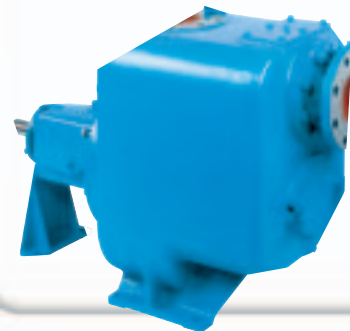

Model VHS & VJC

Vertical Cantilever

Ideal for range of tough sump services... abrasive slurries— mine slurry, fly ash, foundry sand, clay, coal prep, power plants, or large solids handling.

Models VJC – 10 Sizes

- Capacities to 7,500 GPM (1,703 m³/h)
- Heads to 240 feet (73 m)
- Solids to 2.25 inches (57 mm)

Materials: Cast Iron, High Chrome Iron, 316SS

Model VHS – 7 Sizes

- Capacities to 7,000 GPM (1,590 m³/h)
- Heads to 140 feet (43 m)
- Solids to 10 inches (254 mm)

Materials: Cast Iron, High Chrome Iron, 316SS



Model HSU, HSUL & JCU

Submersible

Four different models allow selection of the very best pump for the service conditions whether large, stringy, fibrous solids, or abrasive slurries.

- Capacities to 4,000 GPM (910 m³/h)
- Heads to 220 feet (67 m)
- Temperatures to 194° F (90° C)
- Solids to 6 inches (152 mm)


Materials: Cast Iron, 28% Chrome Iron, CD4MCu, 316SS



ABRASIVES/SOLIDS HANDLING

Model RX

Side Suction Abrasive Slurry




Heavy duty pump designed for economical handling of highly concentrated abrasive slurries at high heads with low speeds. These pumps have gained unparalleled acceptance in the coal preparation, alumina and concrete industries because of their reliability and extreme ease of maintenance.

- Capacities to 3,700 GPM (840 m³/h)
- Heads to 325 feet (100 m)
- Pressures to 200 PSIG (1,380 kPa)
- Solids to 2.875 inches (73 mm)

Materials: HC600

8 Sizes

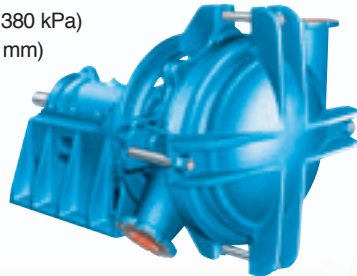

Model JC

Medium Duty Slurry




Ideal for most medium duty abrasive and/or corrosive slurry services. Extra thick wet end components extend wear life. Replaceable wear liner for low maintenance cost. Available with dynamic seal for elimination of seal problems, reduced maintenance. Variety of drive arrangements available for application flexibility.

- Capacities to 7,000 GPM (1,600 m³/h)
- Heads to 240 feet (73 m)
- Temperatures to 250° F (120° C)
- Pressures to 150 PSIG (1,034 kPa)
- Solids to 2.25 inches (57 mm)


Materials: Cast Iron, HC600, 316SS, CD4MCu

15 Sizes

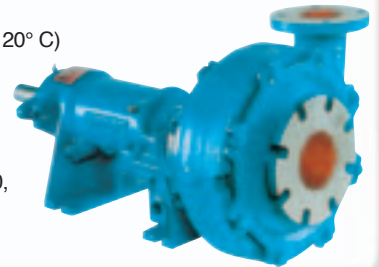

Model 5500

Severe Duty Slurry




The "Workhorse" of severe duty slurry pumps. It's not only built to stand up to the toughest services, but the Model 5500 is also designed for extreme ease of maintenance. A heavy duty power end, extra thick wall sections, and easily replaceable wear parts add up to long, reliable operation.

- Capacities to 11,000 GPM (2,500 m³/h)
- Heads to 370 feet (113 m)
- Temperatures to 250° F (121° C)
- Pressures to 500 PSIG (3,448 kPa)
- Solids to 4 inches (102mm)


20 Sizes

Materials: HC600, CD4MCu

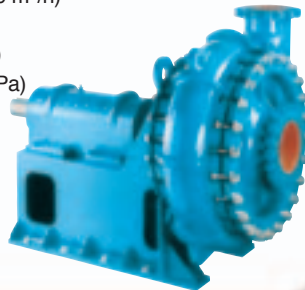

Models SRL/SRL-C/SRL-XT

Abrasive Slurry Handling




The SRL pumps are designed to handle the toughest abrasive slurry. Features include wear resistant rubber liners for maximum life and engineered for ease of maintenance.

- Capacities to 20,000 GPM (4,540 m³/h)
- Heads to 150 feet (46 m)
- Temperatures to 250° F (121° C)
- Pressures to 400 PSIG (2758 kPa)

Lining Materials: Natural Rubber, Neoprene, Nitrile, Polyurethane, Chlorobutyl, Hypalon, Ceramic Composites and Metal Alloys

16 Sizes

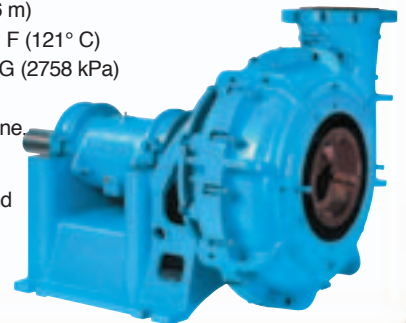

Model HS

Hydro-Solids




For handling sludges and slurries containing large solids, entrained air, fibrous materials, corrosives and abrasives. Features recessed, non-clog impeller. Also available in vertical drypit (Model HSD) design.

- Capacities to 7,000 GPM (1,590 m³/h)
- Heads to 140 feet (43 m)
- Temperatures to 200° F (93° C)
- Pressures to 100 PSIG (690 kPa)
- Solids to 10 inches (254 mm)

Materials: Cast Iron, High Chrome Iron, 316SS, CD4MCu

7 Sizes

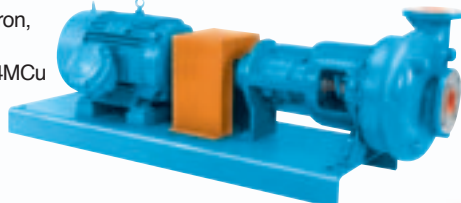

Model CW/CWX

Abrasive Slurry




The CW is a chrome iron, abrasive duty slurry pump with a back pull-out design. The CWX is a Model CW using a "shearpeller" to enable pumping of stringy materials and slurries with entrained air. Both pump options are available with a dynamic seal.

- Capacities to 13,000 GPM (2,950 m³/h)
- Heads to 300 feet (90 m)
- Temperatures to 250° F (120° C)
- Solids to 5 inches (127 mm)

Materials: HC600 only

11 Sizes

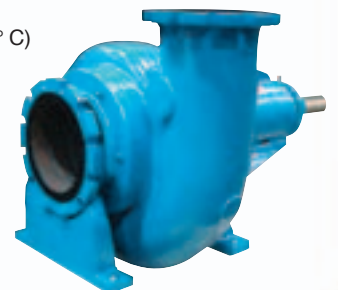

MULTI-STAGE/AXIAL FLOW/DOUBLE SUCTION

Model 3600


Heavy Duty Multi-Stage

Advanced design with proven operating history. Axially split, with many enhanced features that make it an extremely reliable, high performance pump well suited to a wide range of services.

- Capacities to 2,600 GPM (590 m³/h)
- Heads to 5,500 feet (1,675 m)
- Temperatures to 400° F (205° C)
- Pressures to 2,500 PSIG (17,238 kPa)

Materials: Carbon Steel, 12% Chrome, 316LSS, Duplex SS

7 Sizes

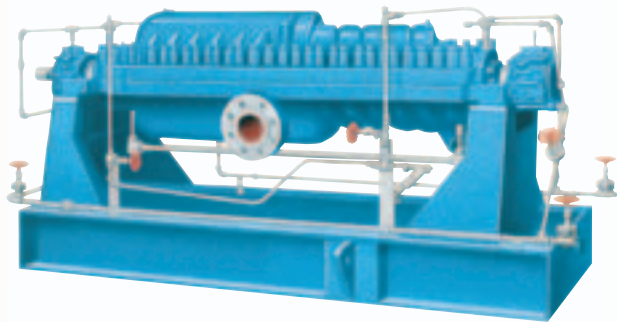

Model 3310H/3311



High Pressure Multi-Stage

Radially split, segmented multi-stage pump; a proven state-of-the-art design for the most demanding high pressure services. Many special features for application flexibility. Ideal for cogeneration, boiler feed, reverse osmosis, booster, water, oil.

- Capacities to 1,200 GPM (272 m³/h)
- Heads to 5,400 feet (1,646 m)
- Temperatures to 374° F (190° C)
- Pressures to 2,465 PSIG (17,000 kPa)

Materials: Carbon Steel/Cast Iron, Carbon Steel/12% Chrome Trim, All 12% Chrome

4 Sizes

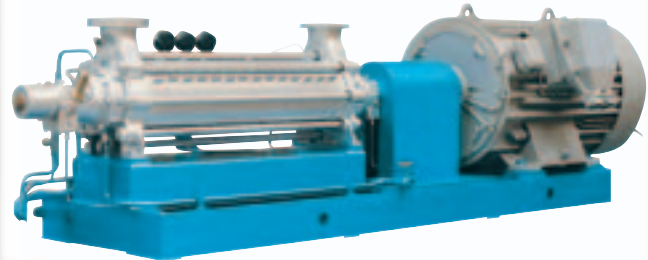

Model Axial Flow®


Axial Flow

For continuous circulation of corrosive/abrasive solutions, slurries, and process wastes. Fabricated elbow or cast elbow designs available. Most suitable for low head, high capacity pumping.

- Capacities to 200,000 GPM (35,000 m³/h)
- Heads to 30 feet (9 m)
- Temperatures to 350° F (180° C)
- Pressures to 150 PSIG (1034 kPa)
- Solids to 9 inches (228 mm)

Materials: Cast Iron, 304SS, 316SS, CD4MCu, Nickel, Monel, Alloy 20, UHB-904L, Titanium, Hastelloy, Sanicro 28

12 Sizes

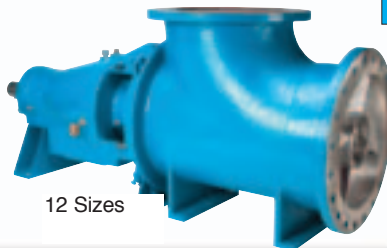

Model 3355


Multi-Stage

Multi-stage ring section pump designed for high pressure services including: boiler feed, reverse osmosis, shower service, and much more.

- Capacities to 1,500 USGPM (340 m³/h)
- Heads to 1,640 feet (500 m)
- Max. speed to 3,600 rpm (3,600 min⁻¹)
- Discharge from 1 1/2" to 5"
- Temperatures to 280° F (140° C)
- Pressures to 800 PSIG (55 bar)*

Materials: Cast Iron, Stainless Steel, Stainless Fitted

8 Sizes

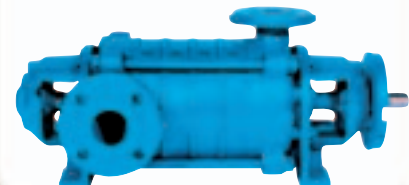

Model 3935


Centrifugal Diffuser Multi-Stage

Centrifugal diffuser type multi-stage pumps well suited for boiler feed, reverse osmosis, petrochemical and hydrocarbon services.

- Capacities to 140 GPM (32 m³/h)
- Heads to 2,600 feet (792 m)
- Temperatures to 400° F (204° C)
- Pressures to 1,500 PSIG (10,340 kPa)

Material: Carbon Steel

4 Sizes

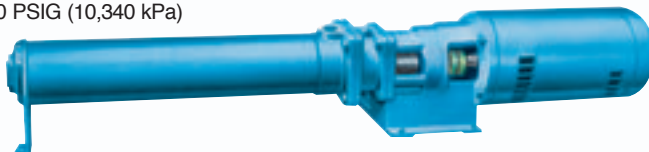

3400 Series

Horizontal Split Case, Double Suction

Designed for a wide range of industrial, municipal, and marine services.

- Capacities to 225,000 GPM (51,098 m³/h)
- Heads to 900 feet (274 m)
- Suction sizes to 78" and discharge sizes to 66"
- Working pressures to 400 PSIG (2,758kPa)
- Temperatures to 350° F (177° C)


Materials: Cast Iron/Bronze, All Iron, All Bronze, Cast Iron/Stainless Steel, All Stainless Steel



SMALL CAPACITY
Model 3410
(to 7,000 GPM/1,590 m³/h)



MEDIUM CAPACITY
Model 3409
(to 12,000 GPM/2,725 m³/h)

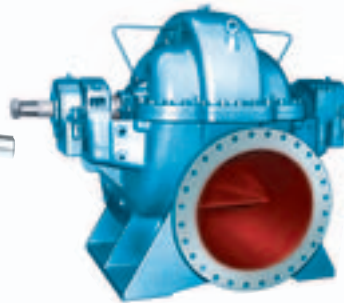

LARGE CAPACITY
Model 3420
(to 65,000 GPM/14,762 m³/h)



EXTRA LARGE CAPACITY
Model 3498
(to 225,000 GPM/51,098 m³/h)

Model 3316


Two-Stage Splitcase

Horizontal split case pumps ideally suited for boiler feed, mine dewatering, and other services requiring moderately high heads with a wide range of operating conditions.

- Capacities up to 3,000 GPM (681 m³/h)
- Heads to 1,000 feet (305 m)
- Temperatures to 350° F (177° C)
- Pressures to 550 PSIG (3,792 kPa)

Materials: Bronze-fitted, Cast Iron, Bronze, 316SS

9 Sizes

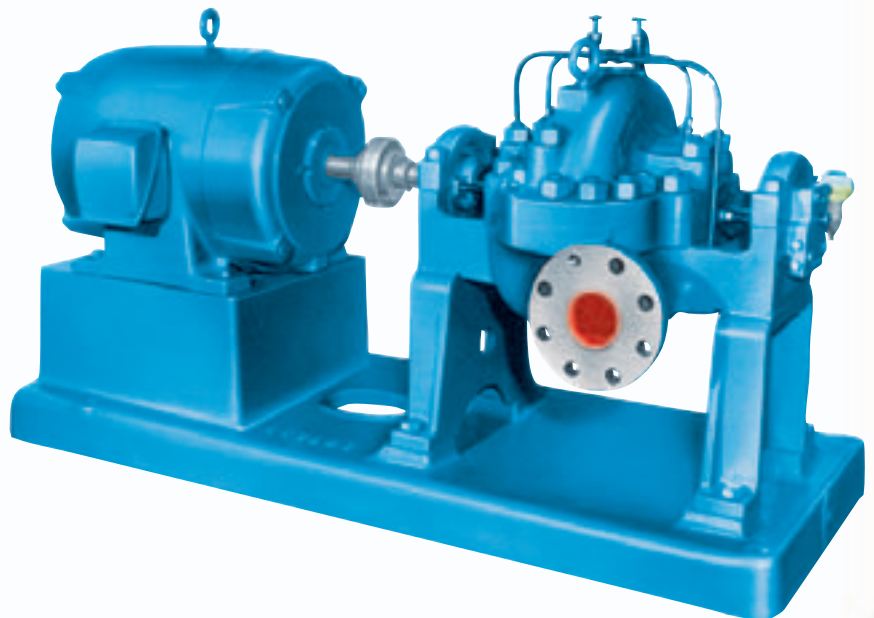

WASTEWATER / VERTICAL

Model NSW


Small Capacity Sewage Pump

Single stage – enclosed non – clog type impeller for pumping wastewater and other non-corrosive liquids with soft solids.

- Capacities to 9,000 GPM (2,044 m³/h)
- Heads to 275 feet (84 m)
- Solids to 6.38 inches (162 mm)

Materials:

Cast Iron, 2-3% Nickel
Cast Iron, Ductile Iron

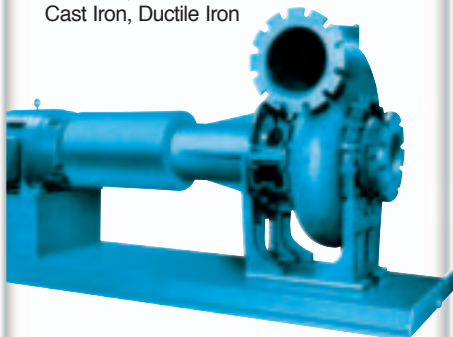

*Also available in vertical configurations (NSWV)

Model NSX


Small Capacity Sewage Pump

Single stage – open Shear-peller impeller specially designed for pumping wastewater, with fibrous or stringy solids.

- Capacities to 4,000 GPM (908 m³/h)
- Heads to 100 feet (30 m)
- Solids to 5.31 inches (133 mm)

Materials:

Cast Iron / 431SS Fitted

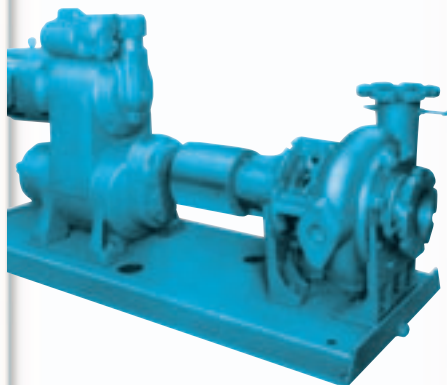

*Also available in vertical configurations (NSXV)

Model NSY


Medium Capacity Sewage Pump

Single stage – enclosed mixed flow type impeller for pumping wastewater and other non-corrosive liquids with soft solids.

- Capacities to 23,000 GPM (5,223 m³/h)
- Heads to 85 feet (26 m)
- Solids to 9 inches (229 mm)

Materials:

Cast Iron, 2-3% Nickel Cast Iron,
Ductile Iron

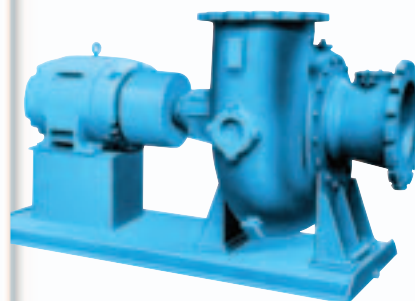

*Also available in vertical configurations (NSYV)

Models SSE, SSF & WSY


Large Capacity Sewage Pumps

The pumps are designed with large, unobstructed passages through the impeller and volute which make them ideally suited for pumping sewage, waste water, and storm water.

- Capacities to 140,000 GPM (31,800 m³/h)
- Heads to 230 feet (70 m)

Materials:

Cast Iron, 2-3% Nickel
Cast Iron, Ductile Iron

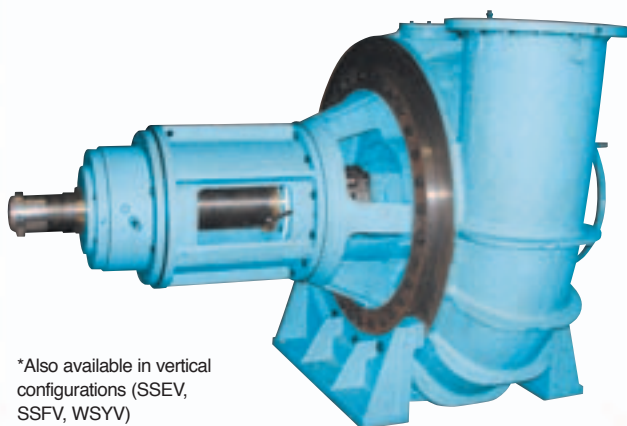

*Also available in vertical configurations (SSEV, SSFV, WSYV)

Model WCAX, YDD, WCA, WCB, WMCC & WMCE


Wet Pit Column Pumps

Wet Pit Column Pumps are custom designed for maximum reliability and high efficiency.

- Capacities to 500,000 GPM (114,000 m³/h)
- Heads to 600 feet (185 m)

Materials:

Bronze Fitted, All Bronze,
SS Fitted, Ni Resist, All SS

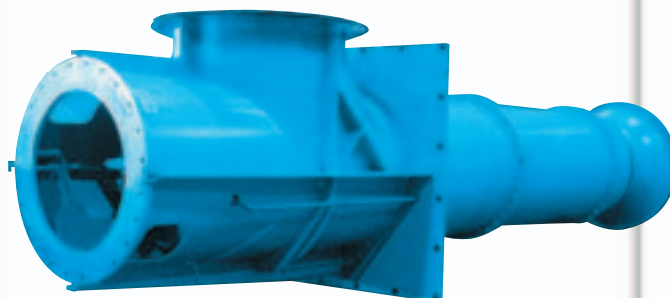

VERTICAL TURBINES

Model VIC

Vertical Can-Type



A wide range of hydraulic conditions allows meeting requirements of virtually every pumping service. Designed to meet custom specifications of the user. Model VIC can-type turbine meets API-610 specifications.

Model VIC

- Capacities to 65,000 GPM (18,168 m³/h)
- Heads to 3,500 feet (1,070 m)
- Temperatures to 500° F (260° C)

Materials: Any Machinable Alloy



Model VIT

Vertical Industrial Turbine



A wide range of hydraulic conditions allows meeting requirements of virtually every pumping service. Designed to meet custom specifications of the user. Model VIT can-type turbine meets API-610 specifications.

Model VIT

- Capacities to 65,000 GPM (14,762 m³/h)
- Heads to 3,500 feet (1067 m)
- Temperatures to 450° F (232° C)

Materials: Any Machinable Alloy



Model VIS

Vertical Submersible



For deep settings or where use of lineshaft pumps is impractical. For irrigation, service water, deep well supply, offshore and mine dewatering.

- Capacities to 7,000 GPM (908 m³/h)
- Heads to 1,400 feet (427 m)

Materials:

Any Machinable Alloy



Model VMP

Vertical Marine



Goolds Model VMP pump is an automatically self-priming unit designed specially for efficient unloading and stripping of product tankers and barges.

- Capacities to 20,000 GPM (4,542 m³/h)
- Heads to 635 feet (194 m)
- Temperatures to 250° F (120° C)



Pick Your Perfect Process Pump



Whether it's for severe corrosives, abrasive slurries, fibrous/stringy solids, high temperature liquids, hazardous fluids, low flow or high capacity services – Goulds has a perfect, reliable solution. The Goulds selection of fluid solutions includes horizontal and vertical configurations in a range of alloy and non-metallic constructions, sealed and sealless. Goulds wide range of products ensures that we have the right pump for virtually every application.

Pump Selection Checklist

The following Pump Selection Checklist is designed to assist users in reviewing most pump requirements for ultimate selection of the best pump. Your Goulds representative has been specially trained in pump application and should be contacted to assist in final pump selection for optimum reliability and safety.

I. REQUIREMENTS	1A SYSTEM	2A LIQUID PROPERTIES	3A SAFETY/ENVIRONMENTAL	4A ECONOMY/RELIABILITY
	Service: _____ Capacity: _____ Total Dynamic Head: _____ NPSH Available: _____ Suction Pressure: _____ Minimum Flow Rate: _____ Total Working Pressure: _____	Liquid: _____ Vapor Pressure: _____ Specific Heat: _____ Viscosity: _____ Solids Size/Content: _____ Specific Gravity: _____ Temperature: _____ Characteristics: (flammable, explosive, carcinogenic, toxic, noxious, regulated, etc.): _____	<input type="checkbox"/> UL label (explosion-proof enclosures) <input type="checkbox"/> Regulations (government, local, plant) <input type="checkbox"/> Temperature limits <input type="checkbox"/> Fugitive emission limits <input type="checkbox"/> Product purity <input type="checkbox"/> Best Available Control Technology <input type="checkbox"/> Reporting requirements	<input type="checkbox"/> MTBF requirements <input type="checkbox"/> Lubrication <input type="checkbox"/> Cooling/Heating <input type="checkbox"/> Operator experience <input type="checkbox"/> Operator maintenance <input type="checkbox"/> Extra product filtering <input type="checkbox"/> Ease of installation
II. PUMP	1B	2B	3B	4B
	Pump Size _____ Impeller diameter _____ HP, efficiency _____ NPSH _R _____ Minimum Pump Flow _____ Speed (RPM) _____	Materials of Construction _____ Bearing cooling _____ Sealing/flushing requirements _____ Jacketing for cooling/heating _____	Explosion-proof enclosures _____ Safety protection options _____ Coupling guard options _____ Casing drain _____ Flange options _____ O-ring materials _____	Type of lubrication _____ Start-up assistance _____ Operator training _____ Maintenance training _____ Baseplate options _____ Oil seal options _____



Visit our website at www.gouldspumps.com

Goulds Pumps

